



LIFT WELL

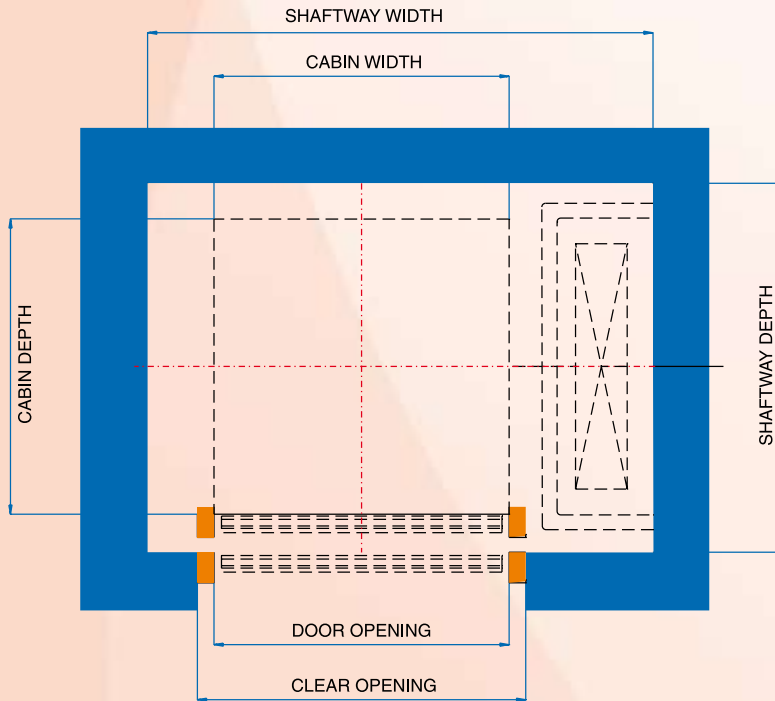

LIFT WELL ELEVATION

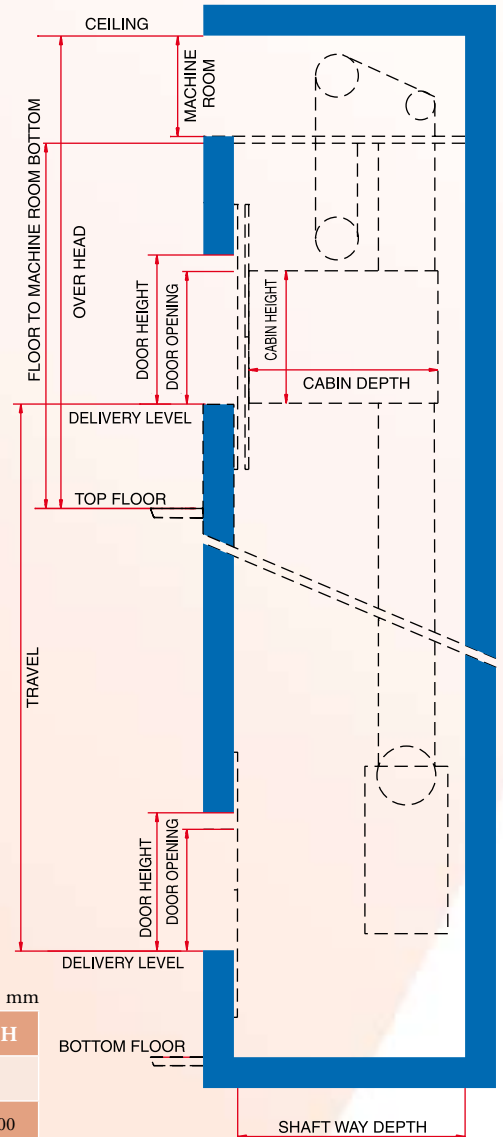

Machine Room Less  
MINIMUM CIVIL DIMENSIONS

UNIT- mm

CAPACITY	SPEED	CAR INSIDE		ENTRANCE		LIFT WELL	PIT	O/H
Load (Kg)	m/sec	Width x Depth	Height	Width	Height	Width x Depth		
50	0.25 to 0.5	600 x 600	760	550	600	1100 x 800	No Pit	3000
100		700 x 700	800	650	700	1200 x 900	No Pit	3000
150		800 x 800	900	750	800	1300 x 1000	No Pit	3100
200		900 x 900	1000	850	900	1400 x 1100	No Pit	3100
250		1000 x 1000	1200	950	1000	1500 x 1200	760	3300
300		1000 x 1000	1200	950	1000	1500 x 1200	900	3300
500		1200 x 1500	1500	1100	1500	1700 x 1700	900	3300

NOTE :

1. Delivery level for Dumb waiter is at 760 mm from floor level.
2. For 250, 300 & 500Kg capacity Dumb waiter the delivery level is considered at floor level.

Small Lifts... Big Benefits

www.easaelevators.com

EASA® DUMB WAITER



Open Type



Vertical Bi-Parting Doors



Swing Door



Capsule - Open Type



Collapsible Door

EASA®